

NOTE:

- 1.100% TEST OPEN SHORT
- 2.INSULATION RESISTANCE:10M ohm(MIN)
- 3.CONDUCTOR RESISTANCE:2 ohm (MAX)
- 4.HI POT TEST :300V AC/10ms




18	4-15-0044-001001	NYLON BRAID W=10.0MM BLACK 1*72	625.0	mm
17	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50.0*2	mm
16	4-22-0091-3007P4	LABEL: "P4" Translucent bottom black words	1	PCS
15	4-22-0050-3007P3	LABEL: "P3" Translucent bottom black words	1	PCS
14	4-22-0049-3007P2	LABEL: "P2" Translucent bottom black words	1	PCS
13	4-22-0048-3007P1	LABEL: "P1" Translucent bottom black words	1	PCS
12	4-15-0039-100201	Heat shrink tube OD:5.0mm Transparent	15.0*4	mm
11	3-03-0004-005001	PBT BLACK NON-migration(UL94V-0)	6	g
10	3-02-0001-532151	PE	10	g
9	3-01-0033-005001	PVC 50P BLACK (UL94V-0)	12	g
8	2-70-0018-011501	HD MINI SAS 36P SHELL 180°	1	PCS
7	2-70-0019-011502	HD MINI SAS 36P PCB/CD	1	PCS
6	2-70-0016-011501	HD MINI SAS 36P PCB/AB	1	PCS
5	2-61-A003-001501	SATA 7P/F Pin:Gold-plate 15u" 180° PBT BLACK	4	PCS
4	1-61-0052-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 04 (Non UL)	1025.0*2	mm
3	1-61-0051-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 03 (Non UL)	1025.0*2	mm
2	1-61-0050-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 02 (Non UL)	1025.0*2	mm
1	1-61-0049-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 01 (Non UL)	1025.0*2	mm
NO.	PART NO.	DESCRIPTION	QTY	UNIT

Legend:

- High-Speed Serial Differential Pairs
- Signal Return
- Sideband Signal

PIN ASSIGNMENT

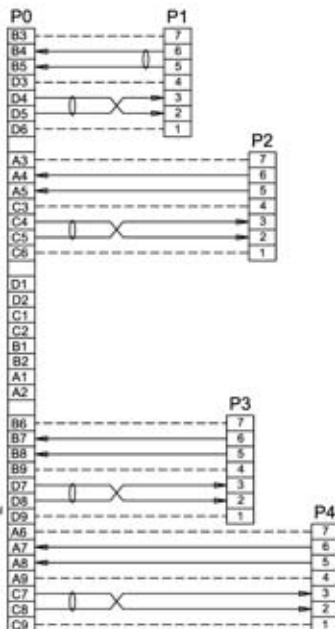

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	Jun.11.14	Tony

CineRAID

DESIGNER	Chen Yongju	DATE	Jun.11.14
DRAWN	Zengwei	DATE	Jun.11.14
CHECKED	Zengwei	DATE	Jun.11.14

CineRAID Systems

HD MINI SAS TO 4x SATA 7P/F 180° CABLE 1M

SIZE	SCALE	DRAWING NO.	REV.
C	XX:XX	6703135	A0
ID NO.		SHEET	1 OF 1