



PIN ASSIGNMENT

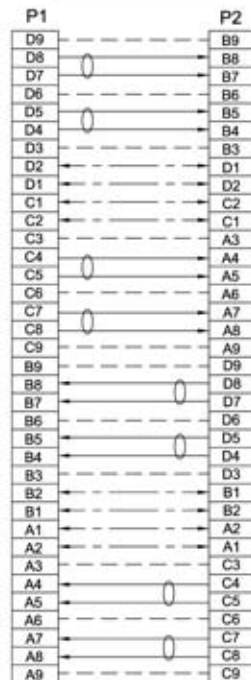

ELECTRICAL TEST:

1. OPEN & SHORT TEST
2. CONNECTION RESISTANCE: 1 OHM (MAX.)
3. INSULATION RESISTANCE: 10M OHM (MIN.)
4. HI-POT TEST: 300V DC/10ms



11	4-15-0044-001001	NYLON BRAID W=10.0MM <BLACK> 1*72	770.0	mm	
10	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50.0*2	mm	
9	3-03-0004-005001	PBT BLACK NON-migration(UL94V-0)	8	g	
8	2-70-0018-011501	HD MINI SAS 36P SHELL 180°	2	PCS	
7	2-70-0019-011502	HD MINI SAS 36P PCB/CD	2	PCS	
6	2-70-0016-011501	HD MINI SAS 36P PCB/AB	2	PCS	
5	1-58-0022-200209	Non-UL FLAT CABLE:30#*4C*PH.0.8mm GRAY	783.0*2	mm	
4	1-61-0052-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE04(Non UL)	780.0*2	mm	
3	1-61-0051-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE03(Non UL)	780.0*2	mm	
2	1-61-0050-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE02(Non UL)	780.0*2	mm	
1	1-61-0049-200251	2C*30#*2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE01(Non UL)	780.0*2	mm	
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT	

CineRAID

APPROVALS	DATE
Design Chen Yongli	Jul.18.14
DRAWN Zeng wei	Jul.18.14
CHECKED Zeng wei	Jul.18.14

CineRAID Systems

HD MINI SAS 180° TO HD MINI SAS 180° CABLE 5.79M

SIZE	SCALE	DRAWING NO.	REV.
C	XX : XX	6703195	A0

DIMENSION AND WEIGHT TOLERANCES ARE:
 DIMENSION: X ± 0.30
 Y ± 0.20
 ANGLE: ± 0.5°
 DO NOT SCALE DRAWING

SHEET 1 OF 3