

4


3

2


1

PART NO. MD-6703166

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	July.04.14	Tony

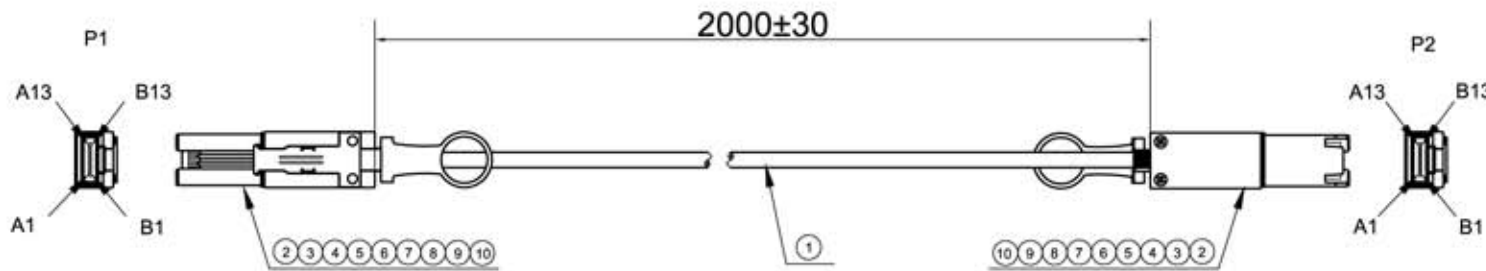

PIN ASSIGNMENT

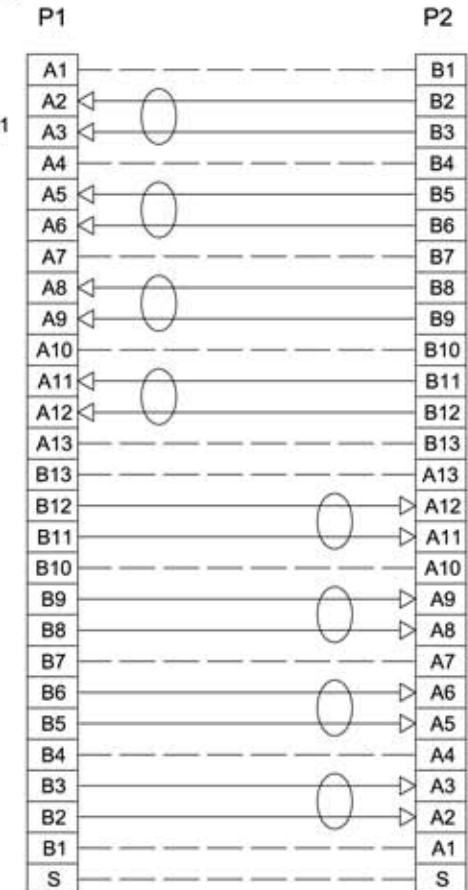

ELECTRICAL TEST:

- 1.OPEN / SHORT 100% TEST.
- 2.CONTACT RESISTANCE : 1Ω(MAX).
3. INSULATION RESISTANCE : 20MΩ (MIN).
- 4.HI-POT : DC 300V /10MS.

10	4-15-0001-200201	Heat shrink tube OD:0.6mm BLACK	3.0*16	mm
9	4-20-0063-001001	ACETATE TAPE W=10mm BLACK	180.0*2	mm
8	4-20-0002-051051	CONDUCTIVE COPPER FOIL W:5.0mm	50.0*2	mm
7	4-13-0032-M26551	SCREW M2*0.65 NICKEL PLATED	4	PCS
6	4-12-0016-000051	EXT.MINI SAS 26P CONDUCTIVE FOAM	2	PCS
5	3-02-0002-086701	TRL-THERMELT-867	15	g
4	2-70-0005-011551	EXT.MINI SAS 26P ZINE ALLOY BOTTOM SHELL NICKEL PLATED WITH LATCH	2	PCS
3	2-70-0002-011551	EXT.MINI SAS 26P ZINE ALLOY TOP SHELL NICKEL PLATED	2	PCS
2	2-70-0004-011551	EXT.MINI SAS 26P PCB (MINI SAS 4X)	2	PCS
1	1-67-0005-200201	UL20276 (28#/2C+D+A/M)*8P+AL.ML+Braid+PAPER+Jacket(COPARTNER)	2064	mm
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT

CineRAID	APPROVALS	DATE	CineRAID Systems		
	DRAWN Xiong.Chunhui	July.04.14	EXT.MINI SAS 26P CABLE 2.0M		
DIMENSION ARE MILLIMETERS TOLERANCES ARE: DECIMALS ANGLES X ± 0.30 ± 3° XX ± 0.20 ± 3°	CHECKED Zeng.wei	July.04.14	SIZE C	SCALE XX : XX	DRAWING NO. 6703166
	APPROVAL Zeng.wei	July.04.14	ID NO.	REV. A0	SHEET 1 OF 1

4

3

2

1