

4

3

2


1

PART NO. MD-6703169



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	July,04,14	Tony

D

HOST

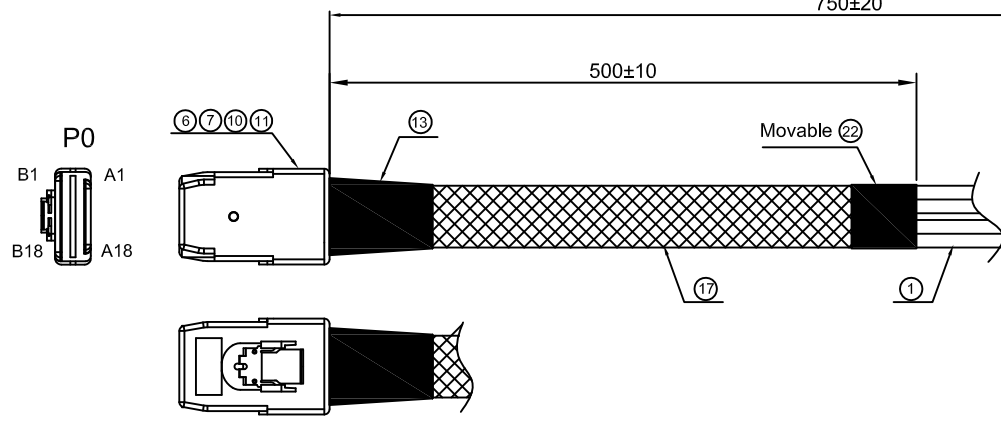

NOTE:  
 1.100% TEST OPEN SHORT  
 2.INSULATION RESISTANCE:20M ohm(MIN)  
 3.CONDUCTOR RESISTANCE : 1 ohm (MAX)  
 4.HI POT TEST :300V DC/10ms

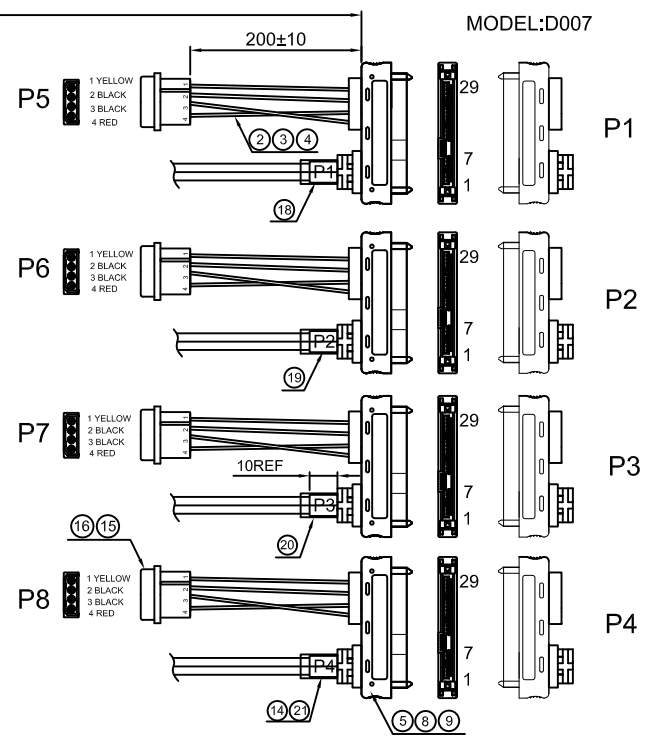

Target

D

C

A

B

B

A

A

22	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50.0	mm
21	4-22-0091-3007P4	LABEL:"P4" Transparence bottom black word	1	PCS
20	4-22-0050-3007P3	LABEL:"P3" Transparence bottom black word	1	PCS
19	4-22-0049-3007P2	LABEL:"P2" Transparence bottom black word	1	PCS
18	4-22-0048-3007P1	LABEL:"P1" Transparence bottom black word	1	PCS
17	4-15-0044-001001	NYLON BRAID W=10.0mm <BLACK> 1*72	520.0	mm
16	4-19-A264-508104	JYC C5081T0B-2 Terminal 20~24AWG	16	PCS
15	4-19-B263-508104	JYC C5081H00 1*4P Housng Nylon66 WHITE	4	PCS
14	4-15-0039-100201	Heat shrink tube OD:5.0mm Transparent	15.0*4	mm
13	4-15-0048-100127	Adhesive Heatshrink TUBE OD:12.7mm	25.0	mm
12	3-01-0004-003001	PVC 30P BLACK (MINI SAS 36P DUSTPROOF COVER 1PCS)	7	g
11	3-02-0002-086701	TRL-THERMELT-867	2	g
10	3-03-0002-005001	PP BLACK	6	g
9	3-02-0001-532151	PE	12	g
8	3-01-0033-005001	PVC 50P BLACK	20	g
7	2-61-A042-011501	LATCH	1	PCS
6	2-70-0001-011501	MINI SAS 36P PCB	1	PCS
5	2-66-A023-001501	SAS29/F CONTACT GOLD PLATED 15u",H,S PA9T BLACK	4	PCS
4	1-57-0083-610203	UL1007 22 AWG OD:1.6mm RED	218.0*4	mm
3	1-57-0007-610205	UL1007 22 AWG OD:1.6mm YELLOW	218.0*4	mm
2	1-57-0081-610201	UL1007 22 AWG OD:1.6mm BLACK	218.0*8	mm
1	1-61-0006-200251	(2C*30#+AL+2D)*2C OD:1.85*5.8mm PANTON 200C UL2863	775.0*4	mm
NO.	PART NO.	DESCRIPTION	Q'TY	UNIT



CineRAID	APPROVALS	DATE
	DRAWN Xiong.chunhui	July,04,14
	CHECKED Zeng.wei	July,04,14
APPROVAL	DATE	
Zeng.wei	July,04,14	

<b>MD MiraDeed Technology</b>			
<b>MINI SAS 36P TO 4x (SAS 29P/F+POWER 4P) 0.75M</b>			
SIZE	SCALE :	DRAWING NO.	REV.
C	XX : XX	6703169	A0
ID NO.			SHEET 1 OF 2

4

3

2

1

4

3

2

1

PART NO. MD-6703169

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	July,04,14	Tony

### PIN ASSIGNMENT

D

D

C


C

B

B

A

A

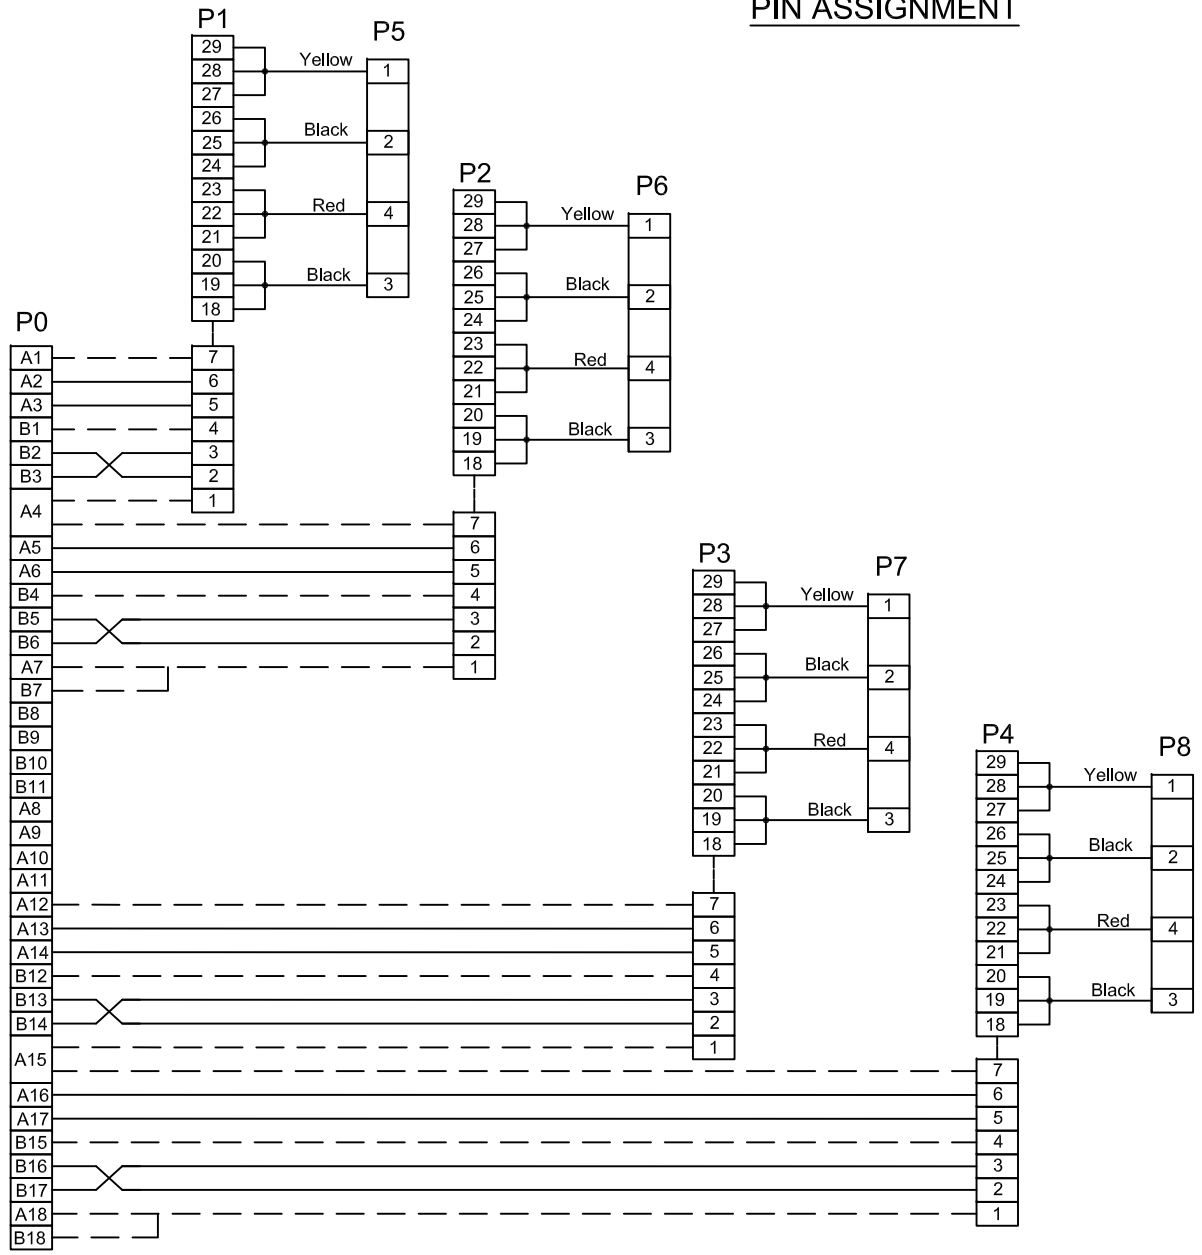

CineRAID	APPROVALS	DATE	<b>MD MiraDeed Technology</b> <b>MINI SAS 36P TO 4x (SAS 29P/F+POWER 4P) 0.75M</b>			
	DRAWN					
<small>DIMENSION ARE MILLIMETERS TOLERANCES ARE:</small> <small>DECIMALS    ANGLES</small> <small>XX ± 0.30    ± 3°</small> <small>XX ± 0.20</small> <small>DO NOT SCALE DRAWING</small>	CHECKED	DATE	SIZE	SCALE :	DRAWING NO.	REV.
	APPROVAL		C	XX : XX	6703169	A0
	Zeng.wei	July,04,14	ID NO.			SHEET 2 OF 2

4

3

2

1